

4MP IP IR DOME CAMERA WITH AUDIO WDR CAMERA

Model #: IPC-DF4MPIR



Features

- 4.0 Megapixel High Resolution
- HD Video Output
- H.264+ Ready, H.264. MJPEG
- 120 dB True WDR
- 3D DNR, BLC
- IR Range: Up to 60 ft
- Dual Video Streams
- IP66 Rating
- True Day/Night


We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative
Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com
www.dss-cctv.com

Technical Specifications

Model No.	IPC-DF4MPIR
Camera	
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/10,000s
Lens	2.8mm @F1.8, angle of view: 92.2°
Lens mount	M12
Day & night	IR cut filter with auto switch
IR Range	12 IR LEDs Up to 40 feet
Angle adjustment	Pan: ± 15°, tilt: 0 ~ 90°, rotation: ± 15°
Day & night	ICR
Wide Dynamic Range	120dB True WDR
Digital Noise Reduction	3D DNR
Backlight Compensation	Yes, zone configurable
Compression Standard	
Video compression	H.264 / MJPEG / H.264+
H.264 codec profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Dual streams	Support
Image	
Max. Image Resolution	2688x1520 4MP
Frame rate	60Hz: 30fps (2688 x 1520), 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Rotate Mode, Saturation, Brightness, Contrast Sharpness adjustable by client software or web browse
ROI Codec	Support
Network	
Network storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP,PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Interoperability	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Security	User Authentication, watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
We Browser	IE 7, IE 8, IE 9, Chrome 8 +, Firefox 3.5 +, Safari 5 +
Reset Button	Yes
General	
Operating conditions	(14°F ~ 140 °F) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 5W
Weather proof rating	IP66
Impact protection	IEC60068-275Eh, 50J; EN50102, up to IK10
Dimension	99.9 x 97.5 x 56.5 mm
Weight	350g

Dimensions

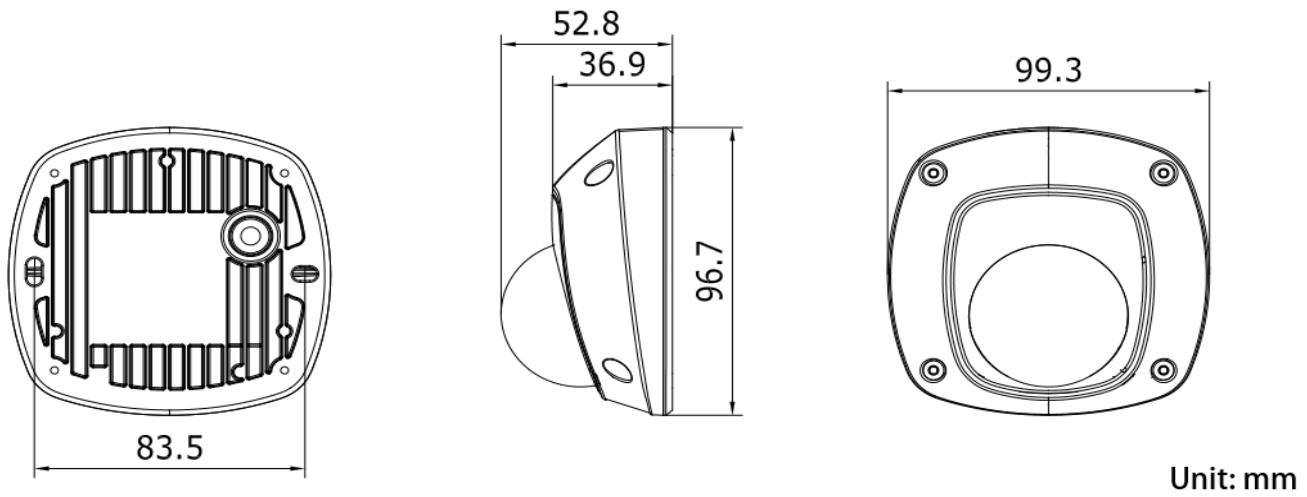

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com