


# 4MP EXIR Dome Network Camera

Model #: IPC-DFR4MPEX

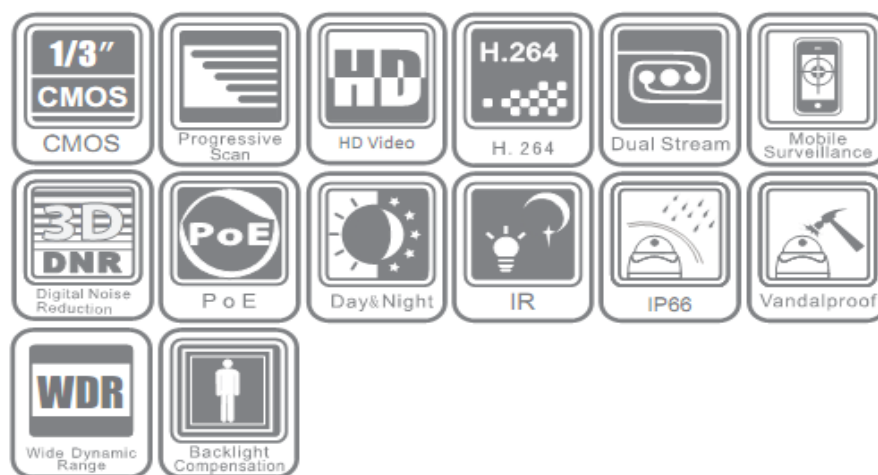

## Features

- 4.0 Megapixel High Resolution
- HD Video Output
- H.264+ Ready, H.264. MJPEG
- 120 dB True WDR
- 3D DNR, BLC
- EXIR Range: Up to 100 ft
- Dual Video Streams
- IP66 Rating
- Metal housing & Bracket
- True Day/Night

# Technical Specifications

|                             |   |
|-----------------------------|---|
| <b>Model No.</b>            | IPC-DFR4MPEX  |
| <b>Camera</b>               |   |
| Image sensor                | 1/3" progressive scan CMOS  |
| Min. illumination           | 0.01 lux @F1.2, AGC ON, 0 lux with IR   |
| Shutter time                | 1/3s ~ 1/10,000s  |
| Lens                        | 2.8mm@ F2.0, Angle of View: 92.2°   |
| Lens mount                  | M12   |
| Day & night                 | IR cut filter with auto switch  |
| Digital noise reduction     | 3D DNR  |
| Wide dynamic range          | 120dB True WDR  |
| <b>Compression Standard</b> |   |
| Video compression           | H.264 / MJPEG / H.264+  |
| H.264 codec profile         | Main profile  |
| Bit rate                    | 32 Kbps ~ 16 Mbps   |
| Dual streams                | Support   |
| <b>Image</b>                |   |
| Network storage             | NAS (Support NFS,SMB/CIFS), ANR   |
| Alarm trigger               | Motion detection, tampering alarm, network disconnect,  |
| Protocols                   | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP,PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6 |
| Interoperability            | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI  |
| Security                    | User Authentication, watermark  |
| <b>Network</b>              |   |
| Network storage             | NAS   |
| Alarm trigger               | Motion detection, tampering alarm   |
| Protocols                   | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)        |
| Interoperability            | ONVIF, PSIA, CGI  |
| Security                    | user authentication, watermark  |
| <b>Interface</b>            |   |
| Communication interface     | 1 RJ45 10 M / 100 M Ethernet interface  |
| We Browser                  | IE 7, IE 8, IE 9, Chrome 8 +, Firefox 3.5 +, Safari 5 +   |
| <b>General</b>              |   |
| Operating conditions        | (-22°F ~ 140 °F) humidity 95% or less (non-condensing)  |
| Power supply                | 12 VDC ± 10% , PoE (802.3af)  |
| Power consumption           | Max. 5.5W (Max. 7.5W with IR cut filter on)   |
| Weather proof rating        | IP66  |
| IR range                    | Up to 100 ft  |
| Dimension                   | 5.0" x 3.8"   |
| Weight                      | 1.5 lbs   |



We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: [sales@dss-cctv.com](mailto:sales@dss-cctv.com)

[www.dss-cctv.com](http://www.dss-cctv.com)

# Dimensions

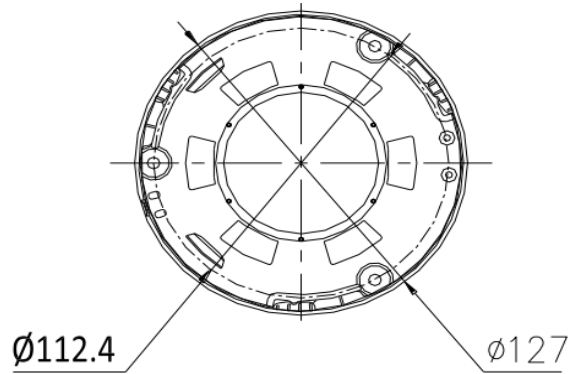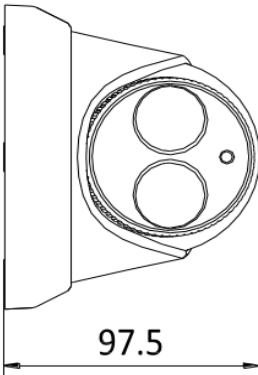

Unit: mm

We reserve the right to modify product design and specification without notice and without incurring any obligation

**For more information please contact a DSS Sales Representative**

**Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: [sales@dss-cctv.com](mailto:sales@dss-cctv.com)**

**[www.dss-cctv.com](http://www.dss-cctv.com)**